

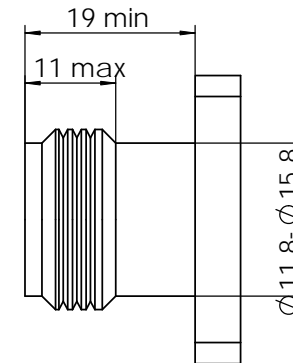


REVISIONS		
REV	DESCRIPTION	DATE
1	Add note 6	2020.1.2

Installation instruction

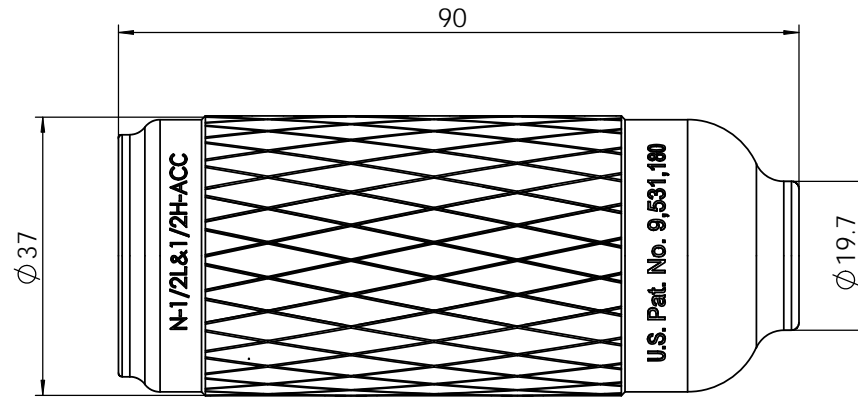

receptacle(female)
connector requirement



optional accessory

1. UV resistant (1120W/960 h)
 2. Life: 10 years
 3. Working temperature: -55 °C~+155 °C
 4. Acid alkali resistant
 5. Waterproofing standard IP68
 6. This boot can be installed **before** and **after** cable jumper assembly.
- * Optional accessory: with guide AFJ89-6, this boot can be installed **after** cable jumper assembly.

DRAWN	TITLE			<h3 style="text-align: center;">Amphenol</h3> <small>AMPHENOL FUYANG CO.,LTD CHANGZHOU, CHINA</small>		
CHECKED	WPS boot, N male for 1/2" superflex and 1/2" annular cable					
APPROVED	SHEET	SCALE	METRIC	PART NO.		
	1/1	1.5/1	mm	AF2040677		
				AFS-2040677		
				1		1