
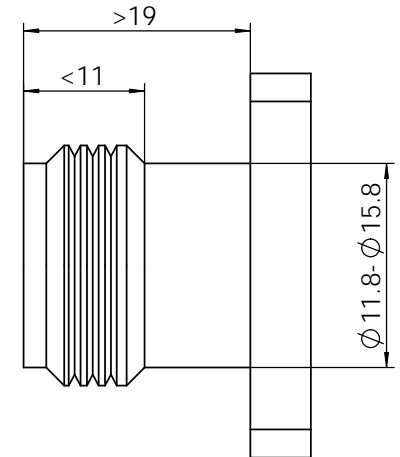


| REVISIONS | | |
|-----------|-------------|----------|
| REV | DESCRIPTION | DATE |
| 1 | Add note 6 | 2020.1.2 |

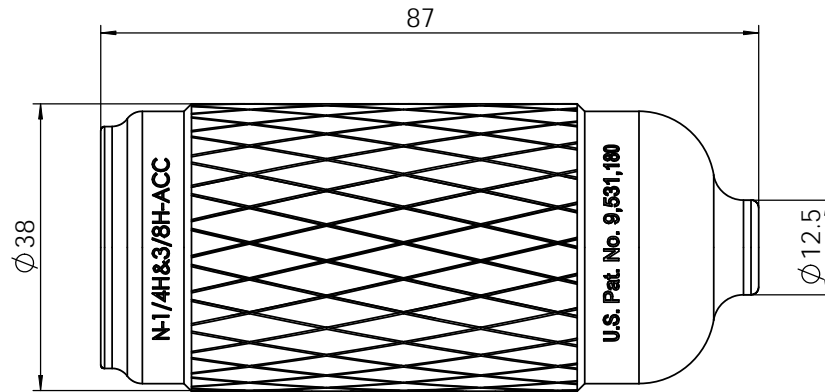

receptacle(female)
connector requirement

1. UV resistant (1120W/960 h)
2. Life: 10 years
3. Working temperature: -55 °C~+155 °C
4. Acid alkali resistant
5. Waterproofing standard IP68
6. This boot needs to be installed **before** cable jumper assembly.

| | | | | | | | | |
|----------|--|-------|--------|---|--|-------------|-----|-----|
| DRAWN | TITLE | | | Amphenol AMPHENOL FUYANG CO.,LTD CHANGZHOU, CHINA | | | | |
| CHECKED | WPS boot, N male for 1/4" superflex and 3/8" superflex cable | | | | | DRAWING NO. | VER | REV |
| APPROVED | SHEET | SCALE | METRIC | PART NO. | | | | |
| | 1/1 | 1.5/1 | mm | AF2040674 | | | | |
| | | | | AFS-2040674 | | | 1 | 1 |