


ABS Coaxial Cable Product Type: T11TQP77-LTV (CATV) Black

Series 11 Coaxial Cable
Copper Clad Steel Conductor
Foamed Polyethylene Dielectric
Bonded APA Laminate Shield
77% Aluminum Braid
Moisture Inhibiting lifeTime®
APA Laminate Shield (QuickPrep)
Black PVC Jacket
NEC 820 CATV Listed

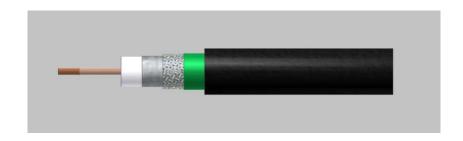

Cable Ordering Information

Part Number	Description	NEC / CSA Listing	
011E77V04BK0310000R1	T11TQP77-LTV (CATV) Black	NEC 820 CATV	

Characteristics

Material	Detail	inches	mm
Inner Conductor	Copper Clad Steel	0.0641	1.63
Dielectric	Foamed Polyethylene	0.280	7.11
1st Outer Conductor	Sealed APA Tape	0.288	7.32
2 nd Outer Conductor	60% Aluminum Braid	0.312	7.92
3 rd Outer Conductor	APA Tape (QuickPrep)		
Floodant	Moisture Inhibiting lifeTime®		
Jacket	PVC, Flame Retardant, Black	0.400	10.2
Twisted Pairs			
Messenger			
Mechanical Specifications			
Minimum Bend Radius, in. (mm) Product Weight	(less reel)	1.5 59 lbs /kft	(38.10)

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: t11tqp77-ltv (catv) black_1.8ghz18.docx

Revision: 12.19.2018 Page: 1 of 2

uncontrolled copy

All Rights Reserved,

Specifications subject to change without notice

Amphenol Broadband Solutions 358 Hall Avenue

Wallingford, CT 06492
Toll Free +1-800-677-2288
Toll +1-434-432-1800
Fax +1-434-432-1821
www.timesfiber.com



ABS Coaxial Cable Product Type: T11TQP77-LTV (CATV) Black

Electrical Specifications					
Impedance, Ω	75 ± 3				
Velocity of Propagation, %	85				
Capacitance, Nominal	16.2 pF/ft	53.2 pF/m			
DC Resistance	Ω / kft	Ω/km			
Inner Conductor	12.3	40			
Outer Conductor	4.24	14			
Loop	16.5	54			

Attenuation, Maximum @ 68 °F (20 °C)					
Frequency, MHz	dB / 100 ft	dB / 100 m			
5	0.38	1.25			
55	0.96	3.15			
211	1.90	6.23			
250	2.05	6.73			
270	2.13	6.99			
300	2.25	7.38			
330	2.35	7.71			
350	2.42	7.94			
400	2.60	8.53			
450	2.75	9.02			
500	2.90	9.51			
550	3.04	9.97			
600	3.18	10.43			
750	3.65	11.98			
870	4.06	13.32			
1000	4.35	14.27			
1100	4.54	14.90			
1200	4.71	15.45			
1218	4.92	16.14			
1300	4.96	16.27			
1400	5.14	16.86			
1500	5.45	17.88			
1600	5.66	18.57			
1700	5.86	19.23			
1794	5.99	19.65			
1800	6.04	19.82			

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: t11tqp77-ltv (catv) black_1.8ghz18.docx

Revision: 12.19.2018 Page: 2 of 2

uncontrolled copy

All Rights Reserved, Specifications subject to change without notice Amphenol Broadband Solutions 358 Hall Avenue Wallingford, CT 06492

Toll Free +1-800-677-2288
Toll +1-434-432-1800
Fax +1-434-432-1821
www.timesfiber.com