




ABS Coaxial Cable Product Type: TX10540JB

540 Series Coaxial Cable

Copper Clad Aluminum Conductor
Foamed Polyethylene Dielectric
Seamless Aluminum Tube Outer Conductor
Underground Floodant
Medium Density Polyethylene Jacket

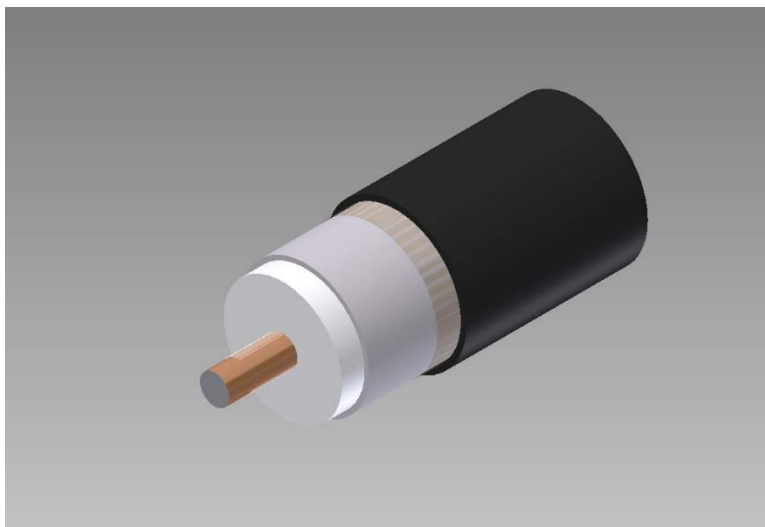

Cable Ordering Information

Part Number	Description	NEC / CSA Listing
750540JB00BK00100001	TX10540JB	n/a

Characteristics

Material	Detail	inches	mm
Inner Conductor	Copper Clad Aluminum	0.124	3.15
Dielectric	Foamed Polyethylene	0.513	13.0
Outer Conductor	Seamless Aluminum Tube	0.540	13.7
Floodant	Underground	0.550	---
Jacket	Polyethylene, Outdoor, Black	0.610	15.5
Messenger	---	---	---
Cable Width	---	---	---

Mechanical Specifications

Minimum Bend Radius, in. (mm)	4.0	(102)
Product Weight, lbs/kft (kg/km)	94	(140)

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: tx10540jb_1.8ghz17
Revision: 11.2.2017
Page: 1 of 2

uncontrolled copy

All Rights Reserved,
Specifications subject to change without notice

Amphenol Broadband Solutions
358 Hall Avenue
Wallingford, CT 06492
Toll Free +1-800-677-2288
Toll +1-434-432-1800
Fax +1-434-432-1821
www.timesfiber.com



Electrical Specifications

Impedance, Ω	75 ± 2	
Velocity of Propagation, %	88	
Capacitance, Nominal	15.3 pF/ft	50.2 pF/m
DC Resistance	Ω / kft	Ω / km
Inner Conductor	1.02	3.35
Outer Conductor	0.59	1.94
Loop	1.61	5.29
Structural Return Loss, minimum	dB	
5~1002 MHz	30	

Attenuation, Maximum @ 68 °F (20 °C)

Frequency, MHz	dB / 100 ft	dB / 100 m
5	0.14	0.46
55	0.47	1.54
211	0.95	3.12
250	1.03	3.38
270	1.07	3.51
300	1.13	3.71
330	1.19	3.90
350	1.23	4.04
400	1.32	4.33
450	1.40	4.59
500	1.49	4.89
550	1.56	5.12
600	1.64	5.38
750	1.85	6.07
870	2.01	6.59
1000	2.17	7.12
1100	2.35	7.71
1200	2.44	8.01
1218	2.45	8.04
1300	2.54	8.33
1400	2.65	8.69
1500	2.75	9.02
1600	2.85	9.35
1700	2.94	9.65
1794	3.03	9.94
1800	3.04	9.97

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: tx10540jb_1.8ghz17
Revision: 11.2.2017
Page: 2 of 2

uncontrolled copy

All Rights Reserved,
Specifications subject to change without notice

Amphenol Broadband Solutions
358 Hall Avenue
Wallingford, CT 06492
Toll Free +1-800-677-2288
Toll +1-434-432-1800
Fax +1-434-432-1821
www.timesfiber.com