


Topless Splitter Series ABS100TP

**Product Features**

- 1.2 GHz performance capabilities
- Topless slim design, all ports face down
- RoHS2 Compliant, CE Certification
- Optional snap-in Quick Mount
- Capacitive coupled F-ports prevent hum modulation
- Machined F-ports pressure sealed

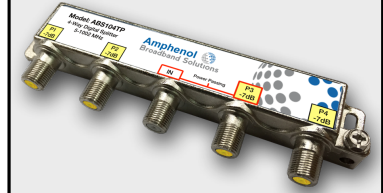

Model Number	Broadband Digital Splitters - ABS100TP			
Specifications	Frequency	ABS102TP	ABS103TPB	ABS104TP
Insertion Loss (max dB)	(MHz)	Min/Max	Min/Max	Min/Max
	5-14	3.6	6	7.4
	15-40	3.6	6	7
	41-200	3.8	6.2	7.4
	201-550	3.9	6.3	7.7
	551-750	4.1	6.5	8
	751-1002	4.3	7	8.5
	1003-1218	4.6	7.5	8.7
<b>Isolation (min dB)</b>				
	5-14	22	22	22
	15-40	30	30	30
	41-200	25	25	25
	201-550	25	25	25
	551-750	22	22	22
	751-1002	22	22	22
	1003-1218	22	22	22
<b>Return Loss (min dB)</b>				
	5-14	18	18	18
	15-40	25	20	20
	41-200	20	20	20
	201-550	18	18	18
	551-750	18	18	18
	751-1002	18	18	18
	1003-1218	17	17	17
<b>RFI (dB)</b>				
	5-1218	100		
Surge Protection	6KV Ring Wave Surge, IEEE C62.41 Cat A3			
Water Proof Test(min)	15psi			
Impedance	75Ω			
Power Passing	30VDC/1A			

Specifications Are Subject To Change Without Notice © 2005-2008 Extreme Broadband Engineering LLC. All rights reserved. Extreme Broadband Engineering is a registered trademark. Infinity Premise™ is a trade of Extreme Broadband Engineering.