


500 Series Coaxial Cable  
Copper Clad Aluminum Conductor  
Foamed Polyethylene Dielectric  
Seamless Aluminum Tube Outer Conductor  
Underground Floodant  
Medium Density Polyethylene Jacket

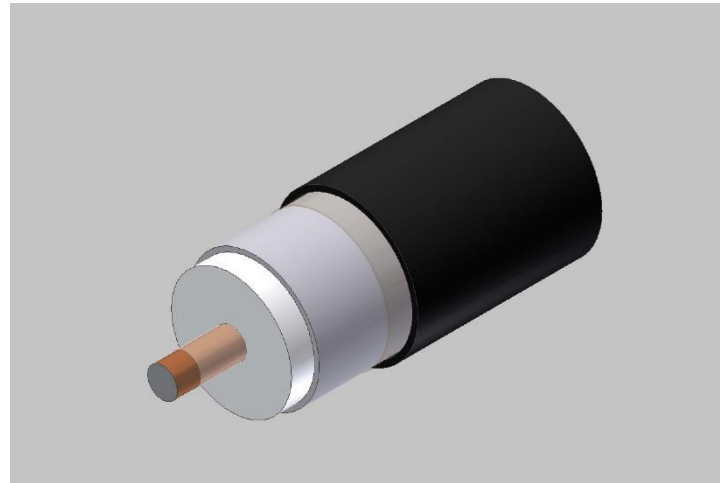

### Cable Ordering Information

Part Number	Description	NEC / CSA Listing
750500JB00BK00100001	T10500JB	n/a

### Characteristics

Material	Detail	inches	mm
Inner Conductor	Copper Clad Aluminum	0.109	2.77
Dielectric	Foamed Polyethylene	0.450	11.4
Outer Conductor	Seamless Aluminum Tube	0.500	12.7
Floodant	Underground	---	---
Jacket	Polyethylene, Outdoor, Black	0.570	14.5
Messenger	---	---	---
Cable Width	---	---	---

### Mechanical Specifications

Minimum Bend Radius, in. (mm)		4.0	( 102)
Product Weight, lbs/kft (kg/km)	(less reel)	103	( 153)

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: t10500jb\_1.8ghz17  
Revision: 11.1.2017  
Page: 1 of 2

Amphenol Broadband Solutions  
358 Hall Avenue  
Wallingford, CT 06492  
Toll Free +1-800-677-2288  
Toll +1-434-432-1800  
Fax +1-434-432-1821  
www.timesfiber.com

**uncontrolled copy**

All Rights Reserved,  
Specifications subject to change without notice

Electrical Specifications		
Impedance, $\Omega$	75 $\pm$ 2	
Velocity of Propagation, %	87	
Capacitance, Nominal	15.3 pF/ft	50.2 pF/m
DC Resistance	$\Omega$ / kft	$\Omega$ / km
Inner Conductor	1.34	4.40
Outer Conductor	0.36	1.18
Loop	1.70	5.58
Structural Return Loss, minimum	dB	
5~1002 MHz	30	

Attenuation, Maximum @ 68 °F (20 °C)		
Frequency, MHz	dB / 100 ft	dB / 100 m
5	0.16	0.52
55	0.55	1.80
211	1.08	3.55
250	1.19	3.92
270	1.24	4.07
300	1.31	4.30
330	1.38	4.54
350	1.43	4.69
400	1.53	5.02
450	1.63	5.35
500	1.73	5.68
550	1.82	5.97
600	1.91	6.27
750	2.16	7.09
870	2.35	7.69
1000	2.53	8.30
1100	2.67	8.76
1200	2.80	9.19
1218	2.82	9.25
1300	2.93	9.61
1400	3.05	10.01
1500	3.17	10.40
1600	3.28	10.76
1700	3.40	11.15
1794	3.50	11.48
1800	3.51	11.52

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: t10500jb\_1.8ghz17  
Revision: 11.1.2017  
Page: 2 of 2

Amphenol Broadband Solutions  
358 Hall Avenue  
Wallingford, CT 06492  
Toll Free +1-800-677-2288  
Toll +1-434-432-1800  
Fax +1-434-432-1821  
www.timesfiber.com

**uncontrolled copy**

All Rights Reserved,  
Specifications subject to change without notice